

可程式恆溫恆濕機（桌上型）
Bench-top Temperature & Humidity Chamber



Advanced Technology. Key Value. Convenience Safe... 科技創新技術.核心價值.即時安全設計...


規格 (Specification)	THS-F	
溫度與濕度控制 (Temperature And Humidity Control)		
內箱尺寸(Inside Dimensions(W・D・H)cm)	40×40×55cm(WxDxH)	
內容積(Inside Capacity) / 公升(Liter)	88	
外箱尺寸(Outside Dimensions(W・D・H)cm)	101×111×87cm(WxDxH)	
淨重(Net Weight)(kg)	170kg	
絕緣材料(Insulation)	防火PU發泡	
內箱材料(Internal Material)	#304不銹鋼板(SUS#304)	
外箱材料(External Material)	#304不銹鋼+#9493粉體塗裝 (SUS#304+#9493Powder Coating)	
高溫(High Temperature(H.T.)℃)	100	
升溫時間(Heating Time(20℃～H.T.)min)	30	
低溫(Low Temperature(L.T.))	-20	0
降溫時間(Cooling Time(20℃～L.T.)min)	60	30
濕度範圍(Humidity Range)	30R.H%～98R.H%	
溫度分佈均勻度(Temperature Uniformity ℃)	±1℃(-20℃～100℃)	
濕度準確度(Humidity Uniformity %R.H)	±3	
溫度穩定度(Temperature Stability ℃)	±0.2	
濕度穩定度(Humidity Stability %R.H)	±2	
溫度解析度(Temperature Resolution ℃)	±0.01	
濕度解析度(Humidity Resolution %R.H)	±0.1	
主要裝置 (Major Device)		
循環系統(Circulation)	機械式的對流系統 (Mechanical Convection System)	
冷凍系統(Cooling System)	空氣冷卻密閉型 (Air Cooling Hermetic) HFC.環保冷媒	
	一元式 (Single-Stage)	
加熱系統(Heating System)	平衡溫度 (Balance Temperature) P.I.D + P.W.M. + S.S.R.	
加濕系統(Humidification System)	平衡濕度 (Balance Humidity) P.I.D + P.W.M. + S.S.R.	
加濕給水系統(Humidification Water Supply)	自動水位控制 (Automatic Water Regulating)	
控制器(Controller)	IPC Baced Touch Panel	
電源(Power Source)	AC 220V / 1 φ	
水質(Water Quality)	蒸餾水 (Distilled Water Only)	
環境溫度(Environmental Temperature)	+ 5℃～ + 30℃	

※標準配件 (Standard Accessories): 自動進水(Automatic Water Supply)

※擴充附件 (Optional Accessories): 時序插座(Power Supply Socket), Cm通訊介面(Communication Interface)

※以上規格, 請以實體報價為主 (For Above Accessories, Their Actual Specifications May Vary.)

溫濕度可控制能力範圍表(Temperature&Humidity Range)

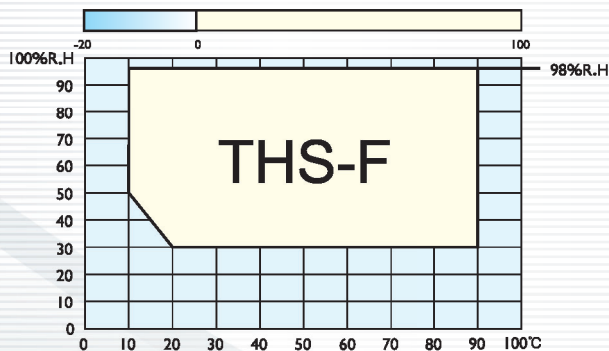

Model Code

